




Qualità | Competenza | Innovazione | dal 1974

PRODUCT DATASHEET

PA 15

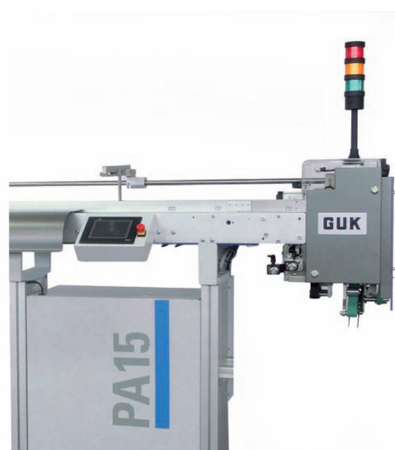

Overview

High-performance feeder

The PA 15 solution allows you to insert pre-folded elevations directly from the warehouse. It is equipped with a servo motor transmission, optionally left output. or right., suction cup introduction mechanism for feeding up to 12 mm thick elevations, 2.40 m loading surface, transmission on servo motor and direct control of the packaging machine, end of charge sensor.

Notes

- Code reader (opt)
- Paper reserve check
- Autonomous transmission SERVO
- Charging plan up to 2.40m (opt)
- Digital adjustment of the rollers
- 90 ° belt conveyor
- Base on wheels with height adjustment (opt)

Technical Data

Family

Guk

Speed (fold / min)

Max. 400 / min depending on the quality and thickness of the paper

Formats	Min.29x29x2mm Typ. 35x50x8mm Max.150x78x12mm
Transmission	Pinion or pulley with motion taken by the packaging machine, or with its own servomotor
Models	PA 15 L PA 15 R

▲ Related applications



FEEDING

Cross folded leaflets

Headquarters

Via Piersanti Mattarella, 10
20093 Cologno Monzese (MI)
www.dcm-italia.it

T +39 02 26 26 3604
F +39 02 24 25 650
E dcm milano@dcm-italia.it

Branch office

Via Mario Vellani Marchi, 80
41124 Modena

T +39 059 22 15 64
F +39 059 22 16 87
E dcmmodena@dcm-italia.it